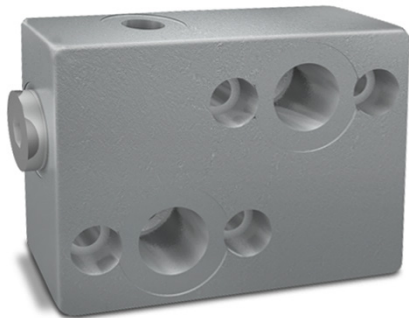


VALVOLA SBLOCCAFRENO FLANGIABILE SU MOTORI DANFOSS SERIE OMP/OMR

SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

BRAKE UNCLAMPING VALVE, FLANGEABLE TO DANFOSS MOTORS OMP/OMR

IMPIEGO:

Valvola utilizzata per sbloccare il freno idraulico dei motori.

MATERIALI E CARATTERISTICHE:

Corpo: acciaio zincato.

Componenti interni: acciaio temprato termicamente e rettificato

Guarnizioni: BUNA N standard

MONTAGGIO:

Flangiare V1 e V2 al motore, collegare le rimanenti bocche V1 e V2 all'alimentazione e collegare la bocca da 1/4" al freno motore.

USE AND OPERATION:

This valve is used to unlock the motors hydraulic brake.

MATERIALS AND FEATURES:

Body: zinc-plated steel.

Internal parts: hardened and ground steel.

Seals: BUNA N standard

APPLICATIONS:

Flange V1 and V2 to the motor, connect the other side of V1 and V2 to the pressure flow and connect the 1/4" port to the motor brake.



CODICE CODE	SIGLA TYPE	PORTATA MAX MAX FLOW Lt. / min	PRESSIONE MAX MAX PRESSURE Bar	PESO WEIGHT Kg.
V0333	VSBF 1/2" OMP/OMR	60	300	1,312

